

- Power Boosted Compact three-stage pump
- Designed for continuous operation
- Input air(4~8 bar)
- Aluminum oil tank with oil gauge. Total weight 21.5 kg
- Infinitely variable pressure adjustment between 70~700 bar
- High efficiency cooling system makes the pump suitable in extreme environment
- Operate four wrenches at the same time
- Designed to reduce cycle time and improve productivity




High-speed system    Designed for Non-Stop    Simple Control    Faster & Easier    Light, Compact & Durable

## RFP AIR-3 Hydraulic Pneumatic Pump

RFP Air 3 Pump is designed with a highly efficient cooling system making the pump suitable for extreme environments. Compact automatic three-stage flow can start in high pressure. Light, Compact, and Durable design offers the operator efficient mobility. RAFTORQ provides after-sales service all over the world.

### Additional features

- Pressure Relief Button - Release pressure in the case of pump stopped
- Air Relief Port - Ensure the operation of the pump in cold and hot conditions
- Pressure Adjuster & Pressure Relief Valve

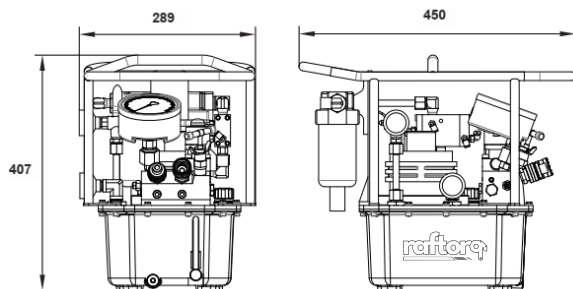

### PUMP SPECIFICATIONS

MODEL	RFP-AIR 3
POWER	3 KW
STAGE	3
FLOW (LOW-MID-HIGH)	8.6-2.2-1.1 L/min
OUTPUT PRESSURE	70~700 Bar
AIR IN	4~8 Bar
OIL TANK CAPACITY	8 L
WEIGHT	21.5 Kg
OPERATING WRENCH	2/4
DIMENSION	407x289x450 mm

“Tight your Trust”



**KSA Sales & Service Center**

+966 133420009 | PO Box 30036 | Al Jubail 31951

sales@raftorq.com | www.raftorq.com | Kingdom of Saudi Arabia