

Heavy duty aluminum-titanium composite light body

360°×180° swivel, no space constraint, free operation.

Constantly repeatable accuracy ±3%

Maximum torque power with minimum wall thickness

Designed to tighten and loosen nuts requiring high torque

Pressure relier valve prevents over pressure

Various cassettes, adaptors and reducers are available

The new locking coupler ensures the oil keep free access.

Suitable for continuous operation at maximum pressure.

High-speed system

High-performance housing


Click & Change Flexible Design

Light, Compact & Durable


RFH® Hex Drive Hydraulic Torque Wrench

RFH series works directly on the nuts, and its body suits well in the narrow space. The aluminum-titanium alloy makes the wrench light and highly intense.

RFH series ranges from 230N.m to 44500N.m; covers the most bolts size, and is the most comprehensive available in the market. RAFTORQ provides after-sales service all over the world.

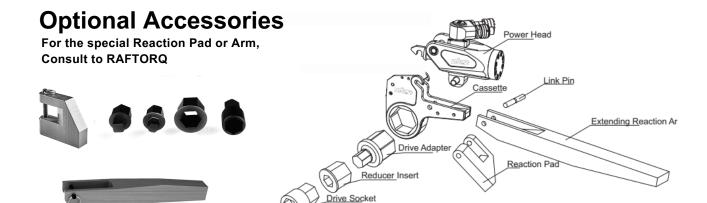



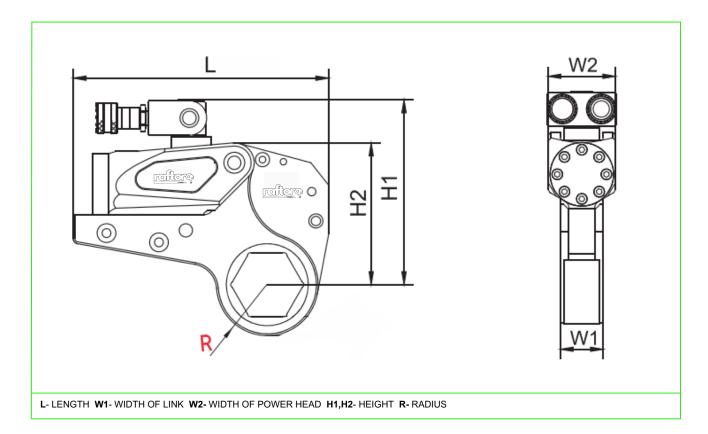

MODEL	NUT RANGE	L	H1	H 2	W1	W2	R		DRIVE UNIT WEIGHT	RATCHET UNIT WEIGHT	TORQUE	
IMPERIAL		Inch				in. (min)	in. (max)	Lbs.	Lbs.	Ft-lbs (Min)	Ft-lbs (Max)	
RFH 2	3/4 - 2.3/8	7.7	5	4	1	2	1.06	1.81	2	3.5	171	1780
RFH 4	7/8 - 3.1/8	10.2	7	5.7	1.7	3	1.42	2.40	4.4	9.7	431	4774
RFH 8	1 3.7/8	12	8.1	6.7	2.1	3.3	1.81	3.07	7	17.6	807	8683
RFH 14	2 - 4.5/8	14.2	9.4	8	2.5	3.9	2.36	3.43	12.1	25.6	1366	13659
RFH 30	4.1/4 - 6.7/8	16.9	11.9	10.7	3	5	3.07	5.04	25.1	63.9	3088	32886

METRIC		mm				mm (min)	mm (max)	Kg	Kg	Nm (Min)	Nm (Max)	
RFH 2	19 - 60	195.4	125.9	102.3	32	51	27	46	1	1.6	232	2414
RFH 4	36 - 80	258	187	145.7	42	66	36	61	2	4.4	585	6474
RFH 8	41 - 100	304	207	169	53	83	46	78	3.3	8	1094	11774
RFH 14	50 - 120	361	239	204	64	99	60	87	6	11.6	1852	18521
RFH 30	110 - 175	430	303	272	85	131	78	128	11.4	29	4 188	44593

"Tight your Trust"

