

Robust and silent air motor 3 Kw

Designed for continuous operation

CE and EAC Certified

Specially engineered for minimal noise disturbance

Infinitely variable pressure adjustment between 70~700 bar

High efficiency cooling system makes the pump suitable in extreme environment

Operate four wrenches at the same time

Designed to reduce cycle time and improve productivity



High-speed system

Designed for Non-Stop

Simple Control

Robust & Silent

Light, Compact & Durable

RFP AIR PRO Hydraulic Pneumatic Pump


RFP Air Pro is equipped with a cutting-edge cooling system for optimal performance in harsh conditions—completely Europe-made offerings, designed to exceed expectations in quality and excellence. Silent, Light, Compact, and Durable design offers the operator efficient mobility. RAFTORQ provides after-sales service all over the world.

Additional features

Pressure Relief Button - Release pressure in the case of pump stopped

Air Relief Port - Ensure the operation of the pump in cold and hot conditions

Wheel for easy movement, on request

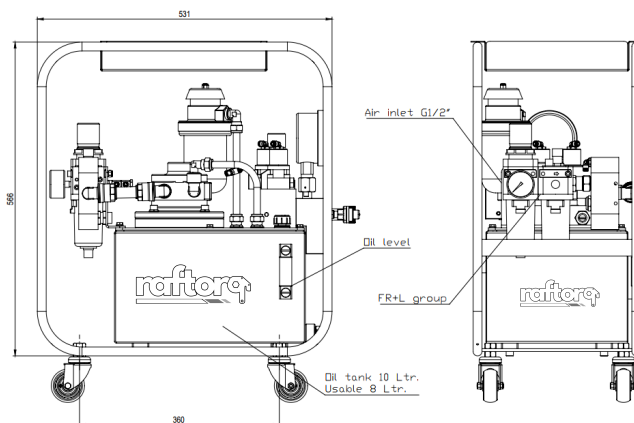

PUMP SPECIFICATIONS

MODEL	RFP AIR PRO
POWER	3 KW
OIL FLOW LP	10.5 L/Min
OIL FLOW HP	1.0 L/Min
OUTPUT PRESSURE	70~700 Bar
AIR IN	7 Bar
RESERVOIR SIZE	10 L
WEIGHT	28 Kg
OPERATING WRENCH	2/4
DIMENSION	(WxDxH) 360x531x566 mm

“Tight your Trust”



KSA Sales & Service Center

+966 133420009 | PO Box 30036 | Al Jubail 31951

sales@raftorq.com | www.raftorq.com | Kingdom of Saudi Arabia